

# Pressed plug end with gasket

## CPSL



### Description

Plug ends are pressed with a male end on the duct side to blind it at air tightness class D. The plug end rim is long enough to easily secure it with WGO screws without any risk of cutting the gasket's double lip.



CPSL plug ends are equipped with a stop fold which prevents inserting the fitting too deep into the duct.



Safe edges (rolled edges) allow the duct installer safer installation of the ductwork, by minimizing the possibility of cuts.

#### Available materials - Product code example


CPSL-... – galvanized steel sheet

#### Product code example

Product code: CPSL - aaa

type \_\_\_\_\_  
Ød \_\_\_\_\_

### Dimensions

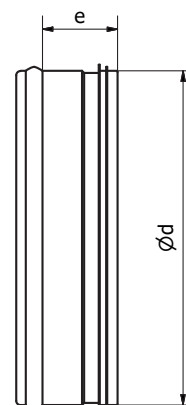

$\text{Ø}d_{nom}$ [mm]	Weight [kg]
80	0.10
100	0.10
125	0.10
150	0.20
160	0.20
200	0.30
250	0.60

### Installation method

