




**Description**


The CSLI is designed for stopping ducts.

**Product code example**

Product code: **CSLI - 25 - 200**



**Dimensions**

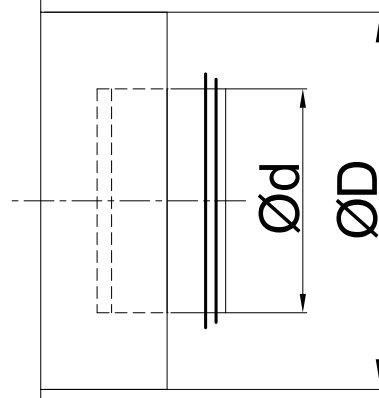

*isolation 10 mm*

| $\varnothing d$<br>[mm] | $\varnothing D$<br>[mm] | Weight<br>[kg] | $\varnothing d$<br>[mm] | $\varnothing D$<br>[mm] | Weight<br>[kg] |
|-------------------------|-------------------------|----------------|-------------------------|-------------------------|----------------|
| 80                      | 100                     | 0.1            | 140                     | 160                     | 0.25           |
| 100                     | 125                     | 0.15           | 160                     | 180                     | 0.25           |
| 125*                    | 160                     | 0.2            | 180                     | 200                     | 0.3            |

\*standard CSLI-10-125 is made of the outer jacket of diameter d=160mm, it is possible to order the execution of the outer jacket with a diameter of 150mm, then the sign is as follows: CSLI-10-125-150

*isolation 16 mm*

| $\varnothing d$<br>[mm] | $\varnothing D$<br>[mm] | Weight<br>[kg] | $\varnothing d$<br>[mm] | $\varnothing D$<br>[mm] | Weight<br>[kg] |
|-------------------------|-------------------------|----------------|-------------------------|-------------------------|----------------|
| 80                      | 112                     | 0.2            | 160                     | 192                     | 0.5            |
| 100                     | 132                     | 0.2            | 200                     | 232                     | 0.8            |
| 125                     | 157                     | 0.3            | 250                     | 280                     | 1.1            |

*25 mm insulation*

| $\varnothing d$<br>[mm] | $\varnothing D$<br>[mm] | Weight<br>[kg] | $\varnothing d$<br>[mm] | $\varnothing D$<br>[mm] | Weight<br>[kg] |
|-------------------------|-------------------------|----------------|-------------------------|-------------------------|----------------|
| 100                     | 150                     | 0.4            | 250                     | 300                     | 1.5            |
| 125                     | 180                     | 0.5            | 280                     | 315                     | 1.8            |
| 140                     | 200                     | 0.6            | 300                     | 355                     | 2.1            |
| 150                     | 200                     | 0.6            | 315                     | 355                     | 2.2            |
| 160                     | 224                     | 0.7            | 355                     | 400                     | 2.6            |
| 180                     | 224                     | 0.9            | 400                     | 450                     | 3.2            |
| 200                     | 250                     | 1.0            | 450                     | 500                     | 3.8            |
| 224                     | 280                     | 1.2            | 500                     | 560                     | 4.1            |