

Rubber foam insulated male coupling with the gasket

F...-NSL



Description

The F09-NSL-ddd male coupling is used to join round spiral ducts insulated with rubber foam. The factory-fit EPDM rubber gasket ensures the highest airtightness class D for both the residential and industrial ventilation systems.

The rubber width on the coupling is applied to eliminate the missing part of the insulation on the spiral ducts, which is not complete because of the transport conditions.

Marking example

Product code:

F09 - NSL - - 100


rubber thickness Q:

- 09
- 13
- 19
- 25


type sheet:

- galvanised
- stainless steel K
- aluminium A

diameter

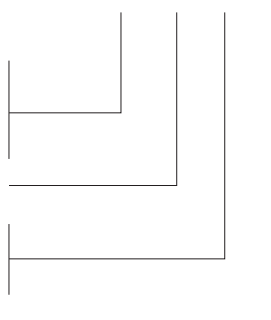

Dimensions

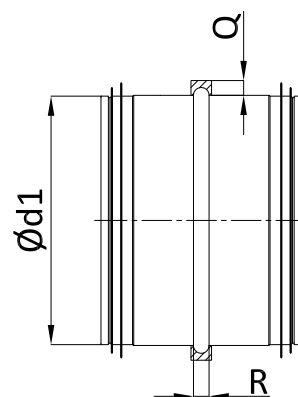

$\varnothing d_{nom}$ [mm]	R [mm]
80	8
100	8
125	8
150	8
160	8
200	8
250	8