

Short reducers for ventilation systems

FLX-RPC/FLX-RSCL



Description


FLX-RPC/FLX-RSCL reducers are used with the FLX-HDPE/FLX-HDPE-A semi-rigid ducting. The reducer is made by seam welding for improved installation airtightness. The duct is connected by inserting it into the reducer. The air tightness class can be increased to class B by wrapping the joints with the TAL, MET or DUCT sealing tape.

Available materials — Product code example

FLX-RPC-...-... - galvanized steel sheet
 FLX-RSCL-...-... - galvanized steel sheet


Product code example

Product code: **FLX-RPC** - aaa - bbb




Dimensions

FLX-RPC



FLX-RSCL

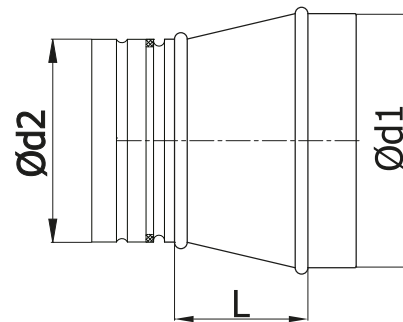

Product code	$\varnothing_{1\text{ nom}}$ [mm]	$\varnothing_{2\text{ nom}}$ [mm]	L [mm]	Weight [kg]
FLX-RPC-100-075	100	75	18	0.20
FLX-RPC-125-075	125	75	28	0.20
FLX-RPC-160-075	160	75	34	0.24
FLX-RSCL-100-090	100	90	47	0.19
FLX-RSCL-125-090	125	90	74	0.24
FLX-RSCL-160-090	160	90	113	0.35