

# Filter elements

## FSBQ-W



### Description

The FSBQ-W filter elements are designed for use in the FSBQL duct filters. The filter elements are made of pleated filter element mats and reinforced with a steel wire mesh. The FSBQ-W filter elements are available in filtration classes EU3 and EU5. All filter elements are wrapped in protective plastic film which must be removed before installation.

#### Product code example

Product code: FSBQ-W - aa - bbb



### Technical specifications

FSBQ-W3 class EU3 filter element  
(for 5400 m<sup>3</sup>/h/m<sup>2</sup>)

**Initial resistance:** 40 Pa


**Final resistance:** 200-250 Pa

FSBQ-W5 class EU5 filter element  
(for 900 m<sup>3</sup>/h/m<sup>2</sup>)

**Initial resistance:** 45 Pa

**Final resistance:** 450 Pa

### Dimensions

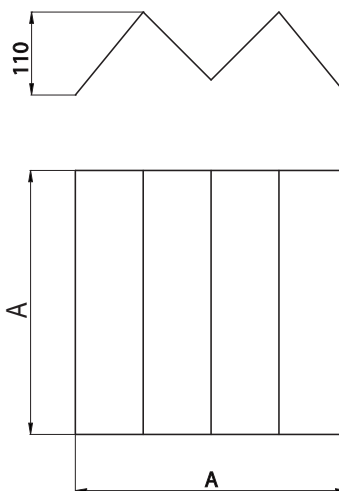

Type	A [mm]	Filtration class
FSBQ-W3-100	160	EU3
FSBQ-W5-100	160	EU5
FSBQ-W3-125	180	EU3
FSBQ-W5-125	180	EU5
FSBQ-W5-150	210	EU3
FSBQ-W5-150	210	EU5
FSBQ-W3-160	210	EU3
FSBQ-W5-160	210	EU5
FSBQ-W3-200	250	EU3
FSBQ-W5-200	250	EU5
FSBQ-W3-250	300	EU3
FSBQ-W5-250	300	EU5
FSBQ-W3-315	360	EU3
FSBQ-W5-315	360	EU5
FSBQ-W3-350	400	EU3
FSBQ-W5-350	400	EU5
FSBQ-W3-400	450	EU3
FSBQ-W5-400	450	EU5
FSBQ-W3-450	500	EU3
FSBQ-W5-450	500	EU5
FSBQ-W3-500	550	EU3
FSBQ-W5-500	550	EU5