Perforated pins
GWP

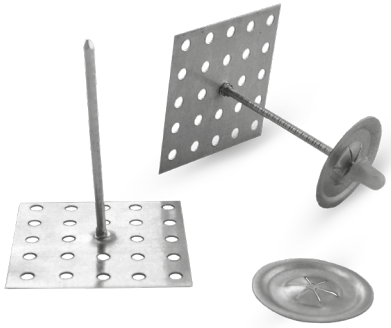

Description

The GWP glued perforated foot pins are designed for fastening thermal insulation layers in plain ducts by attaching the perforated foot using an adhesive layer.
Available sets include GWP pins and KLP clips. KNY caps are sold separately.
A total of 6 to 10 GWP self-adhesive pins are recommended for a surface area of 1 m².

- Nails with galvanized coating, nail diameter 2.8 mm.
- Perforated galvanized steel base.
- Galvanized clamping clip KZ-2, with an outer diameter of 30 mm.

Product code example
Product code: **GWP-33**

type

Dimensions

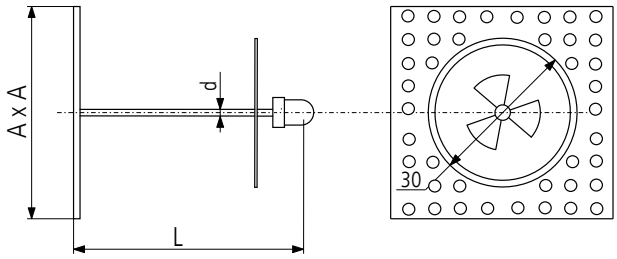

cap
KNY

self-adhesive
pin
clip
KLP



Product code	*L (mm)*	*d (mm)*	*A (mm)*
GWP-20	20	2.8	50
GWP-25	25	2.8	50
GWP-33	33	2.8	50
GWP-43	43	2.8	50
GWP-53	53	2.8	50
GWP-63	63	2.8	50
GWP-67	67	2.8	50
GWP-76	76	2.8	50
GWP-83	83	2.8	50
GWP-90	90	2.8	50
GWP-95	95	2.8	50
GWS-105	105	2.8	50
GWS-115	115	2.8	50
GWP-125	125	2.8	50

ALNOR® ventilation systems
is a registered trademark protected by a technical patent. All modification rights reserved.