

Preinstalled access doors for round ducts

IPR-SNSL



Description

IPR-SNSL access door are preinstalled in the round duct coupling. Due to such combination mounting of access doors in diameters from 80 to 800 mm becomes ultra-quick. There is no need to cut-out the hole, place the doors and tighten the screws - it is all done during production. It's an ideal solution for fire damper inspection purposes.



The male coupling has laser cut edges ideally matched to the access door.

Available versions:


- IPR-SNSL - male connections
- IPR-SNSLF - male and female connections

Example identification

Product code: **IPR-SNSL - aaa**

type _____
 Ød _____

Dimensions

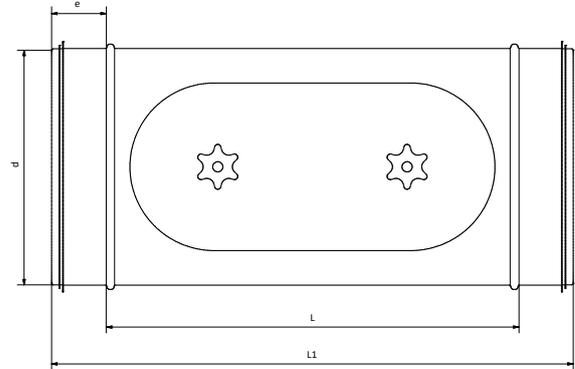

Ød [mm]	L [mm]	L ₁ [mm]	e [mm]
80	290	362	36
100	290	362	36
125	290	362	36
150	360	432	36
160	360	432	36
200	360	432	36
250	360	432	36
315	360	432	36
355	430	540	55
400	430	540	55
450	480	630	75
500	480	630	75
560	480	630	75
630	480	630	75
710	520	720	100
800	520	720	100



Access door can be install, for example, next to fire damper to enable the fire damper inspection without disassembly of the installation.