

MSFI




Description


The MSFI female connectors are designed for coupling fittings.

Product code example

Product code: **MSFI - 25 - 200**



Dimensions

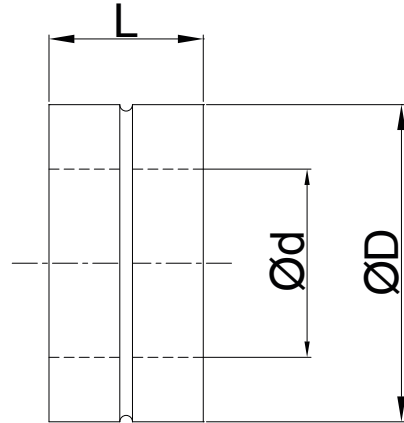

isolation 10 mm

| $\varnothing d$ [mm] | $\varnothing D$ [mm] | Weight [kg] | $\varnothing d$ [mm] | $\varnothing D$ [mm] | Weight [kg] |
|-------------------------|-------------------------|----------------|-------------------------|-------------------------|----------------|
| 80 | 100 | 0.2 | 140 | 160 | 0.3 |
| 100 | 125 | 0.25 | 160 | 180 | 0.35 |
| 125* | 160 | 0.3 | 180 | 200 | 0.35 |

*standard MSFI-10-125 is made of the outer jacket of diameter $d=160$ mm, it is possible to order the execution of the outer jacket with a diameter of 150mm, then the sign is as follows: MSFI-10-125-150

isolation 16 mm

| $\varnothing d$ [mm] | $\varnothing D$ [mm] | L [mm] | Weight [kg] | $\varnothing d$ [mm] | $\varnothing D$ [mm] | L [mm] | Weight [kg] |
|-------------------------|-------------------------|-----------|----------------|-------------------------|-------------------------|-----------|----------------|
| 80 | 112 | 90 | 0.3 | 160 | 192 | 90 | 0.5 |
| 100 | 132 | 90 | 0.3 | 200 | 232 | 90 | 0.6 |
| 125 | 157 | 90 | 0.4 | 250 | 280 | 135 | 1.1 |

25 mm insulation

| $\varnothing d$ [mm] | $\varnothing D$ [mm] | L [mm] | Weight [kg] | $\varnothing d$ [mm] | $\varnothing D$ [mm] | L [mm] | Weight [kg] |
|-------------------------|-------------------------|-----------|----------------|-------------------------|-------------------------|-----------|----------------|
| 100 | 150 | 90 | 0.4 | 250 | 300 | 135 | 1.3 |
| 125 | 180 | 90 | 0.5 | 280 | 315 | 135 | 1.5 |
| 140 | 200 | 90 | 0.5 | 300 | 355 | 135 | 1.7 |
| 150 | 200 | 90 | 0,5 | 315 | 355 | 135 | 1.8 |
| 160 | 224 | 90 | 0,6 | 355 | 400 | 175 | 2.4 |
| 180 | 224 | 90 | 0,6 | 400 | 450 | 175 | 3.0 |
| 200 | 250 | 135 | 0,9 | 450 | 500 | 175 | 3.4 |
| 224 | 280 | 135 | 1,0 | 500 | 560 | 175 | 3.8 |