

Roof flashing for ventilation duct

# PD-EPDM-R



## Description

The PD-EPDM-R roof flashing provides a circumferential seal around the ducts outside the building. The pipe flashing is made of EPDM with good resistance to high temperatures, tensile stress and UV radiation. It can be easily fitted into ducts and outlets with various diameters. The outer part of the pipe flashing base is edged with aluminium to facilitate manual fitting the pipe flashing to the roof profile.

**Ozone resistance:** 70 hours at 500 parts per 100 million

**Temperature resistance:** -55°C to +135°C (transient)

-55°C to +100°C (continuous)


**Maximum tensile strength:** 10MPa

### Product code examples

Product code: **PD-EPDM-R - aaa**

type \_\_\_\_\_  
 Ød<sub>1</sub> \_\_\_\_\_

## Dimensions

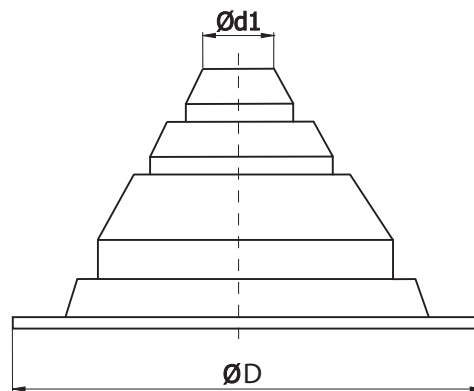

Code	Ød <sub>1</sub> [mm]	AxA [mm]
PD-EPDM-R-080-150	80-150	235
PD-EPDM-R-130-224	130-224	317
PD-EPDM-R-250-450	250-450	461