

Regulating air damper for the actuator installation

PVC-DATFM



Description

A plastic regulating air damper for round ducts, prepared for the installation of an actuator, with female connections, joining by welding (or PVC gluing to Ø250). Manufactured by the process of injection moulding (up to Ø400) or prefabricated (from Ø450).

Available materials - designation example

- PVC-DATFM-... - PVC polyvinyl chloride
- PP-DATFM-... - PP polypropylene
- PPs-DATFM-... - PPs flame resistant polypropylene
- PE-DATFM-... - PE polyethylene

Available materials - upon special order


- PVCW-DATFM-... - white PVC polyvinyl chloride
- PPELs-DATFM-... - PP-EL-s flame resistant electrically conductive polypropylene
- PVDF-DATFM... - PVDF plastic

Designation example:

Product Code: **PVC - DATFM - aaa**

material	_____	_____	_____
type	_____	_____	_____
ØDA	_____	_____	_____

Dimensions

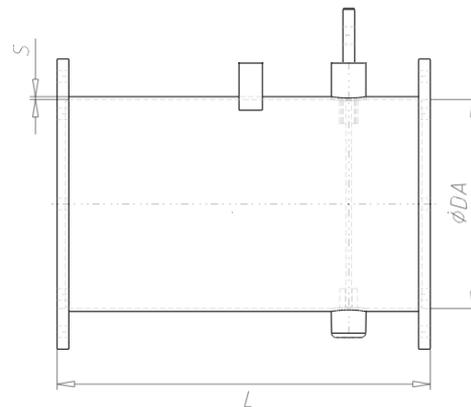

PVC / PVCW			
Ø [mm]	L [mm]	Tolerance [mm]	Min. S [mm]
75	320	0.3	2.5
90	320	0.3	2.5
110	320	0.3	2.5
125	320	0.3	2.5
140	320	0.4	2.5
160	320	0.4	2.5
180	320	0.4	2.5
200	350	0.5	2.5
225	350	0.5	2.5
250	350	0.5	2.5
280	400	0.6	2.5
315	400	0.6	2.5
355	400	0.7	3.0
400	400	0.7	3.0
450	378	0.8	3.6
500	418	0.9	4.0
560	-	-	-
600	458	1.0	5.0
630	-	-	-
700	528	2.5	6.0
710	-	-	-
800	568	3.0	8.0
900	658	3.0	8.0
1000	748	4.0	10.0
1200	968	4.0	12.0
1250	968	4.0	12.0

Regulating air damper for the actuator installation

PVC-DATFM**Dimensions**

<i>PE / PP / PPs / PP-EL-s / PVDF</i>			
\emptyset [mm]	L [mm]	Tolerance [mm]	Min. S [mm]
75	320	0.7	3.0
90	320	0.	3.0
110	320	1.0	3.0
125	320	1.2	3.0
140	320	1.3	3.0
160	320	1.5	3.0
180	320	1.7	3.5
200	350	1.8	3.5
225	350	1.9	3.5
250	350	2.0	3.5
280	400	2.2	3.5
315	400	2.4	4.0
355	400	2.4	4.0
400	400	3.5	4.5
450	378	4.0	5.0
500	418	4.5	5.0
560	418	4.5	6.0
600	458	4.5	6.0
630	488	4.5	6.0
700	528	4.5	8.0
710	538	4.5	8.0
800	568	4.5	8.0
900	658	4.5	10.0
1000	748	5.0	10.0
1200	968	5.0	12.0
1250	968	5.0	12.0