IZOL®system pre-insulated reducers

RSCLFLI

Dimensions

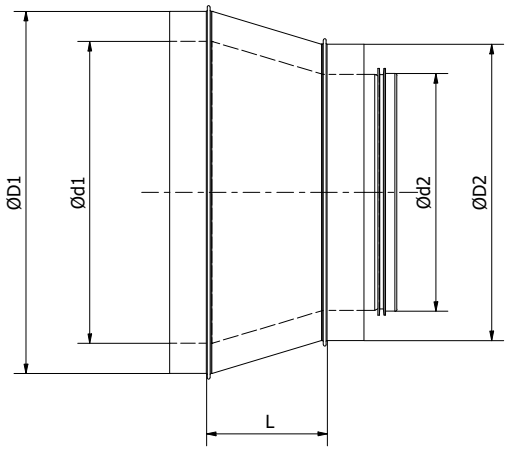

Insulation 16 mm				
Ød1 [mm]	Ød2 [mm]	ØD1 [mm]	ØD2 [mm]	L [mm]
100	80	132	112	63
125	80	157	112	75
125	100	157	132	66
160	80	192	112	94
160	100	192	132	85
160	125	192	157	72
180	80	200	112	212
180	100	200	132	185
180	125	200	157	151
180	160	200	192	103
200	80	232	112	240
200	100	232	132	92
200	125	232	157	92
200	160	232	192	78
200	180	232	200	103
224	80	260	112	277
224	100	260	132	245
224	125	260	157	211
224	160	260	192	163
224	180	260	200	135
224	200	260	232	107
250	80	280	112	332
250	100	280	132	301
250	125	280	157	137

Description

Female-male reducers with a double jacket made of galvanized steel and 16 mm mineral wool insulation, equipped with EPDM gaskets on the male side. Designed to change duct or fitting diameters within a single installation line.

Available materials - product code example:
RSCLFLI-...-... - galvanized steel sheet
RSCLFLI-K-...-... - stainless steel sheet
RSCLFLI-A-...-... - aluminium sheet

Product code example

Product code: **RSCLFLI - 16 - 200 - 125**

type
insulation
Ød₁
Ød₂

ALNOR® ventilation systems
IS LEGALLY PROTECTED TRADEMARK AND TECHNICAL PATENT. ALL RIGHTS RESERVED.

IZOL®system pre-insulated reducers
RSCLFLI

Insulation 16 mm				
Ød1 [mm]	Ød2 [mm]	ØD1 [mm]	ØD2 [mm]	L [mm]
250	160	280	192	115
250	180	280	200	191
250	200	280	232	103
250	224	280	260	131
280	80	315	112	379
280	100	315	132	347
280	125	315	157	308
280	160	315	192	260
280	180	315	200	232
280	200	315	232	205
280	224	315	260	172
280	250	315	280	136
300	80	355	112	410
300	100	355	132	379
300	125	355	157	335
300	160	355	192	287
300	180	355	200	260
300	200	355	232	232
300	224	355	260	200
300	250	355	280	164
300	280	355	315	123
315	80	355	112	425
315	100	355	132	394
315	125	355	157	356
315	160	355	192	308
315	180	355	200	281
315	200	355	232	253
315	224	355	260	220
315	250	355	280	184
315	280	355	315	143
315	300	355	355	116

IS LEGALLY PROTECTED TRADEMARK AND TECHNICAL PATENT. ALL RIGHTS RESERVED.