IZOL®system pre-insulated reducers

RSCLLI

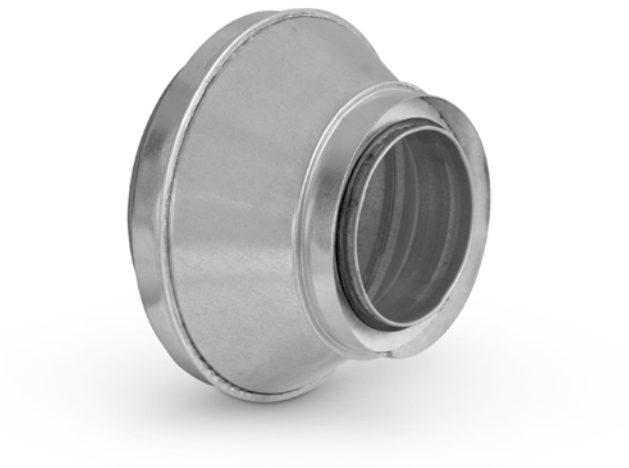

Dimensions

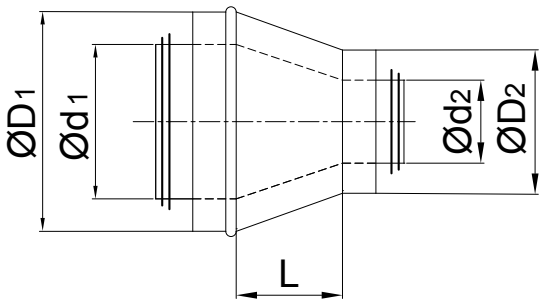

Description

Male-male reducers with a double jacket made of galvanized steel and 16 mm mineral wool insulation, featuring EPDM gaskets on the inner diameter side. Used to change duct diameters within the system.

Available materials - product code example:
RSCLLI-...-... - galvanized steel sheet
RSCLLI-K-...-... - stainless steel sheet
RSCLLI-A-...-... - aluminium sheet

Insulation 16 mm				
Ød1 [mm]	Ød2 [mm]	ØD1 [mm]	ØD2 [mm]	L [mm]
100	80	132	112	26
125	80	157	112	36
125	100	157	132	27
160	80	192	112	55
160	100	192	132	46
160	125	192	157	34
180	80	200	112	167
180	100	200	132	140
180	125	200	157	106
180	160	200	192	58
200	80	232	112	195
200	100	232	132	52
200	125	232	157	55
200	160	232	192	39
200	180	232	200	58
224	80	260	112	232
224	100	260	132	200
224	125	260	157	166
224	160	260	192	118
224	180	260	200	90
224	200	260	232	63
250	80	280	112	267
250	100	280	132	75
250	125	280	157	70

Product code example

Product code: **RSCLLI - 16 - 200 - 125**

type
insulation
$Ød_1$
$Ød_2$

ALNOR® ventilation systems
IS LEGALLY PROTECTED TRADEMARK AND TECHNICAL PATENT. ALL RIGHTS RESERVED.

IZOL®system pre-insulated reducers
RSCLLI

Insulation 16 mm				
Ød1 [mm]	Ød2 [mm]	ØD1 [mm]	ØD2 [mm]	L [mm]
250	160	280	192	60
250	180	280	200	126
250	200	280	232	42
250	224	280	260	29
280	80	315	112	314
280	100	315	132	282
280	125	315	157	243
280	160	315	192	195
280	180	315	200	167
280	200	315	232	140
280	224	315	260	107
280	250	315	280	71
300	80	355	112	345
300	100	355	132	314
300	125	355	157	270
300	160	355	192	222
300	180	355	200	195
300	200	355	232	167
300	224	355	260	135
300	250	355	280	99
300	280	355	315	58
315	80	355	112	360
315	100	355	132	329
315	125	355	157	291
315	160	355	192	243
315	180	355	200	216
315	200	355	232	188
315	224	355	260	155
315	250	355	280	119
315	280	355	315	78
315	300	355	355	51

IS LEGALLY PROTECTED TRADEMARK AND TECHNICAL PATENT. ALL RIGHTS RESERVED.