

Silencer for dust extraction system TRANS-Quick

SILQT-GL



Description


SILQT-GL silencer is a special version of our standard SIL silencer, equipped with TRANS-Quick system clamping elements and outer jacket made of plain butt-welded metal sheet. Insulation thickness: 100, 50 and 25 mm; lengths: 600 and 900 mm. Depending on the diameter, silencers are made of 0.7 mm (dia 100-315mm) or 1.0 mm (dia 350-630mm) metal sheet. For sound insulation and pressure drop data refer to the technical sheet of the SIL silencer.

Available materials - designation example


SILQT-GL-...-...-...- galvanized steel sheet, mineral wool

Designation example

Product code: **SILQT-QT - aaa - bbb - ccc**



Dimensions

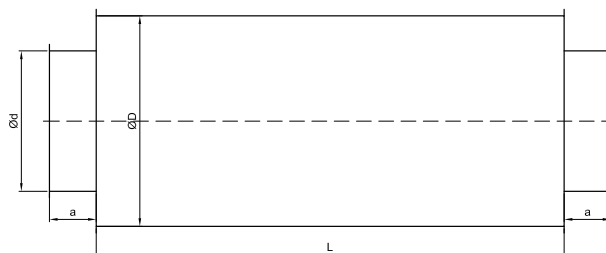

Product code	Insulation (mm)	Diameter Ød (mm)	External dia. ØD (mm)	Length L (mm)	a (mm)
SILQT-GL-100-100-600	100	100	300	600	40
SILQT-GL-100-125-600	100	125	315	600	40
SILQT-GL-100-140-600	100	140	350	600	40
SILQT-GL-100-150-600	100	150	350	600	40
SILQT-GL-100-160-600	100	160	350	600	40
SILQT-GL-100-180-600	100	180	350	600	40
SILQT-GL-100-200-600	100	200	400	600	40
SILQT-GL-100-225-600	100	225	450	600	40
SILQT-GL-100-250-600	100	250	450	600	40
SILQT-GL-100-280-600	100	280	450	600	40
SILQT-GL-100-300-600	100	300	500	600	40
SILQT-GL-100-315-600	100	315	500	600	40
SILQT-GL-100-350-600	100	350	550	600	80
SILQT-GL-100-400-600	100	400	600	600	80
SILQT-GL-100-450-600	100	450	630	600	80
SILQT-GL-100-500-600	100	500	710	600	80
SILQT-GL-100-550-600	100	550	800	600	80
SILQT-GL-100-600-600	100	600	800	600	80
SILQT-GL-100-100-900	100	100	300	900	40
SILQT-GL-100-125-900	100	125	315	900	40
SILQT-GL-100-140-900	100	140	350	900	40
SILQT-GL-100-150-900	100	150	350	900	40
SILQT-GL-100-160-900	100	160	350	900	40
SILQT-GL-100-180-900	100	180	350	900	40
SILQT-GL-100-200-900	100	200	400	900	40
SILQT-GL-100-225-900	100	225	450	900	40
SILQT-GL-100-250-900	100	250	450	900	40
SILQT-GL-100-280-900	100	280	450	900	40
SILQT-GL-100-300-900	100	300	500	900	40
SILQT-GL-100-315-900	100	315	500	900	40

Silencer for dust extraction syteme TRANS-Quick

SILQT-GL

Product code	Insulation (mm)	Diameter Ød (mm)	External dia. ØD (mm)	Length L (mm)	a (mm)
SILQT-GL-100-350-900	100	350	550	900	80
SILQT-GL-100-400-900	100	400	600	900	80
SILQT-GL-100-450-900	100	450	630	900	80
SILQT-GL-100-500-900	100	500	710	900	80
SILQT-GL-100-550-900	100	550	800	900	80
SILQT-GL-100-600-900	100	600	800	900	80
SILQT-GL-50-100-600	50	100	200	600	40
SILQT-GL-50-125-600	50	125	225	600	40
SILQT-GL-50-140-600	50	140	250	600	40
SILQT-GL-50-150-600	50	150	250	600	40
SILQT-GL-50-160-600	50	160	250	600	40
SILQT-GL-50-180-600	50	180	280	600	40
SILQT-GL-50-200-600	50	200	300	600	40
SILQT-GL-50-225-600	50	225	315	600	40
SILQT-GL-50-250-600	50	250	350	600	40
SILQT-GL-50-280-600	50	280	350	600	40
SILQT-GL-50-300-600	50	300	400	600	40
SILQT-GL-50-315-600	50	315	400	600	40
SILQT-GL-50-350-600	50	350	450	600	80
SILQT-GL-50-400-600	50	400	500	600	80
SILQT-GL-50-450-600	50	450	550	600	80
SILQT-GL-50-500-600	50	500	600	600	80
SILQT-GL-50-550-600	50	550	630	600	80
SILQT-GL-50-600-600	50	600	710	600	80
SILQT-GL-50-100-900	50	100	200	900	40
SILQT-GL-50-125-900	50	125	225	900	40
SILQT-GL-50-140-900	50	140	250	900	40
SILQT-GL-50-150-900	50	150	250	900	40
SILQT-GL-50-160-900	50	160	250	900	40
SILQT-GL-50-180-900	50	180	280	900	40
SILQT-GL-50-200-900	50	200	300	900	40
SILQT-GL-50-225-900	50	225	315	900	40
SILQT-GL-50-250-900	50	250	350	900	40
SILQT-GL-50-280-900	50	280	350	900	40
SILQT-GL-50-300-900	50	300	400	900	40
SILQT-GL-50-315-900	50	315	400	900	40
SILQT-GL-50-350-900	50	350	450	900	80
SILQT-GL-50-400-900	50	400	500	900	80
SILQT-GL-50-450-900	50	450	550	900	80
SILQT-GL-50-500-900	50	500	600	900	80
SILQT-GL-50-550-900	50	550	630	900	80
SILQT-GL-50-600-900	50	600	710	900	80

Product code	Insulation (mm)	Diameter Ød (mm)	External dia. ØD (mm)	Length L (mm)	a (mm)
SILQT-GL-25-100-600	25	100	150	600	40
SILQT-GL-25-125-600	25	125	180	600	40
SILQT-GL-25-140-600	25	140	200	600	40
SILQT-GL-25-150-600	25	150	200	600	40
SILQT-GL-25-160-600	25	160	225	600	40
SILQT-GL-25-180-600	25	180	225	600	40
SILQT-GL-25-200-600	25	200	250	600	40
SILQT-GL-25-225-600	25	225	280	600	40
SILQT-GL-25-250-600	25	250	300	600	40
SILQT-GL-25-280-600	25	280	315	600	40
SILQT-GL-25-300-600	25	300	350	600	40
SILQT-GL-25-315-600	25	315	350	600	40
SILQT-GL-25-350-600	25	350	400	600	80
SILQT-GL-25-400-600	25	400	450	600	80
SILQT-GL-25-450-600	25	450	500	600	80
SILQT-GL-25-500-600	25	500	550	600	80
SILQT-GL-25-550-600	25	550	600	600	80
SILQT-GL-25-600-600	25	600	630	600	80
SILQT-GL-25-100-900	25	100	150	900	40
SILQT-GL-25-125-900	25	125	180	900	40
SILQT-GL-25-140-900	25	140	200	900	40
SILQT-GL-25-150-900	25	150	200	900	40
SILQT-GL-25-160-900	25	160	225	900	40
SILQT-GL-25-180-900	25	180	225	900	40
SILQT-GL-25-200-900	25	200	250	900	40
SILQT-GL-25-225-900	25	225	280	900	40
SILQT-GL-25-250-900	25	250	300	900	40
SILQT-GL-25-280-900	25	280	315	900	40
SILQT-GL-25-300-900	25	300	350	900	40
SILQT-GL-25-315-900	25	315	350	900	40
SILQT-GL-25-350-900	25	350	400	900	80
SILQT-GL-25-400-900	25	400	450	900	80
SILQT-GL-25-450-900	25	450	500	900	80
SILQT-GL-25-500-900	25	500	550	900	80
SILQT-GL-25-550-900	25	550	600	900	80
SILQT-GL-25-600-900	25	600	630	900	80