IZOL®system pre-insulated T-pieces

TPCLI

Dimensions

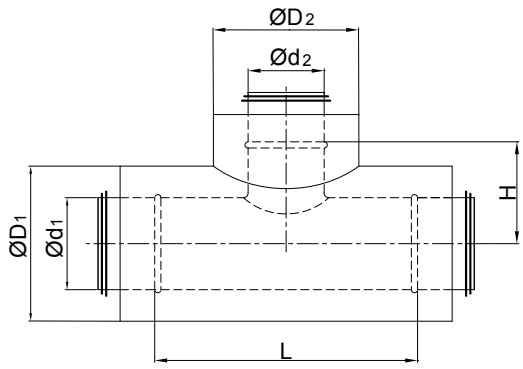

Insulation 16 mm					
Ød1 [mm]	Ød2 [mm]	ØD1 [mm]	ØD2 [mm]	L [mm]	H [mm]
80	80	112	112	140	52
100	80	132	112	97	60
100	100	132	132	132	66
125	80	157	112	97	72
125	100	157	132	130	78
125	125	157	157	165	83
160	80	192	112	140	92
160	100	192	132	130	95
160	125	192	157	166	100
160	160	192	192	209	105
180	80	200	112	140	102
180	100	200	132	175	105
180	125	200	157	215	110
180	160	200	192	260	115
180	180	200	200	285	115
200	80	232	112	140	112
200	100	232	132	175	116
200	125	232	157	215	116
200	160	232	192	209	125
200	180	232	200	285	125
200	200	232	232	249	125
224	80	260	112	140	124
224	100	260	132	175	127
224	125	260	157	215	132
224	160	260	192	260	137

Description

T-pieces with a double jacket made of galvanized steel and 16 mm mineral wool insulation. Equipped with EPDM gaskets, allowing branching of the ventilation system.

Available materials - product code example:
TPCLI-...-... - galvanized steel sheet
TPCLI-K-...-... - stainless steel sheet
TPCLI-A-...-... - aluminium sheet

Product code example

Product code: **TPCLI - 16 - 200 - 125**

type
insulation
$Ød_1$
$Ød_2$

ALNOR® ventilation systems
IS LEGALLY PROTECTED TRADEMARK AND TECHNICAL PATENT. ALL RIGHTS RESERVED.

IZOL®system pre-insulated T-pieces

TPCLI

Insulation 16 mm					
Ød1 [mm]	Ød2 [mm]	ØD1 [mm]	ØD2 [mm]	L [mm]	H [mm]
224	180	260	200	285	137
224	200	260	232	346	137
224	224	260	260	346	137
250	80	280	112	156	137
250	100	280	132	175	140
250	125	280	157	220	145
250	160	280	192	256	150
250	180	280	200	306	150
250	200	280	232	306	150
250	224	280	260	350	150
250	250	280	280	296	150
280	80	315	112	156	155
280	100	315	132	175	155
280	125	315	157	220	160
280	160	315	192	256	165
280	180	315	200	306	165
280	200	315	232	306	165
280	224	315	260	350	165
280	250	315	280	350	165
280	280	315	315	390	165
300	80	355	112	156	162
300	100	355	132	175	165
300	125	355	157	220	170
300	160	355	192	256	175
300	180	355	200	306	175
300	200	355	232	306	175
300	224	355	260	350	175
300	250	355	280	350	175
300	280	355	315	390	175
300	300	355	355	430	175
315	80	355	112	156	170
315	100	355	132	175	173
315	125	355	157	220	178
315	160	355	192	256	182
315	180	355	200	306	182
315	200	355	232	306	182
315	224	355	260	350	182

Insulation 16 mm					
Ød1 [mm]	Ød2 [mm]	ØD1 [mm]	ØD2 [mm]	L [mm]	H [mm]
315	250	355	280	350	182
315	280	355	315	390	182
315	300	355	355	430	182
315	315	355	355	363	182

IS LEGALLY PROTECTED TRADEMARK AND TECHNICAL PATENT. ALL RIGHTS RESERVED.