

Reducing tee

TVRQT-45



Description

Ventilation tee connects with other TRANS-Quick components to transport contaminated air, sawdust, or to simply combine or split airflows. The tee has a reducing 45° branch off.


Wall thickness: 0.7 or 0.9 mm.
45° branch.

Available materials - designation example


TVRQT-45-160-125-100-070 - galvanised steel sheet

Designation example

Product Code: TVRQT-45 - aaa - bbb - ccc - ddd



Dimensions

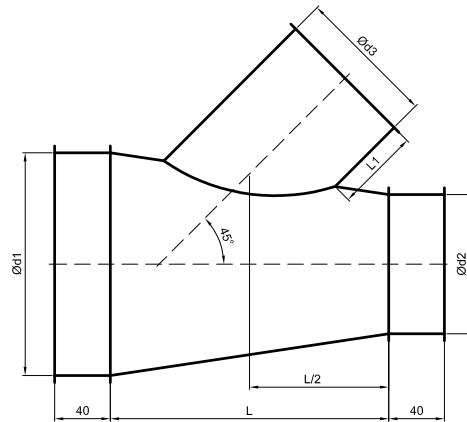

Diameter Ød ₁ [mm]	Diameter Ød ₂ [mm]	Diameter Ød ₃ [mm]	L [mm]	L ₁ [mm]
125	100	100	180	40
150	100	100	180	40
150	125	100	180	40
150	125	125	220	40
160	100	100	180	40
160	125	100	180	40
160	125	125	220	40
160	150	100	180	40
160	150	125	220	40
160	150	150	250	40
180	100	100	180	40
180	125	100	180	40
180	125	125	220	40
180	150	100	180	40
180	150	125	220	40
180	150	150	250	40
180	160	100	180	40
180	160	125	220	40
180	160	150	250	40
180	160	160	270	40
200	100	100	180	40
200	125	100	180	40
200	125	125	220	40
200	150	100	180	40
200	150	125	220	40
200	150	150	250	40
200	160	100	180	40
200	160	125	220	40
200	160	150	250	40
200	160	160	270	40
200	180	100	180	40
200	180	125	220	40
200	180	150	250	40
200	180	160	270	40
200	180	180	300	40

Reducing tee

TVRQT-45

Dimensions

Diameter Ød ₁ [mm]	Diameter Ød ₂ [mm]	Diameter Ød ₃ [mm]	L [mm]	L ₁ [mm]
225	125	100	180	40
225	125	125	220	40
225	150	100	180	40
225	150	125	220	40
225	150	150	250	40
225	160	100	180	40
225	160	125	220	40
225	160	150	250	40
225	160	160	270	40
225	180	100	180	40
225	180	125	220	40
225	180	150	250	40
225	180	160	270	40
225	180	180	300	40
225	200	100	180	40
225	200	125	220	40
225	200	150	250	40
225	200	160	270	40
225	200	180	300	40
225	200	200	350	60
250	125	100	180	40
250	125	125	220	40
250	150	100	180	40
250	150	125	220	40
250	150	150	250	40
250	160	100	180	40
250	160	125	220	40
250	160	150	250	40
250	160	160	270	40
250	180	100	180	40
250	180	125	220	40
250	180	150	250	40
250	180	160	270	40
250	180	180	300	40
250	200	100	180	40
250	200	125	220	40
250	200	150	250	40
250	200	160	270	40
250	200	180	300	40
250	200	200	350	60
250	225	100	180	40
250	225	125	220	40
250	225	150	250	40
250	225	160	270	40
250	225	180	300	40
250	225	225	400	60

Diameter Ød ₁ [mm]	Diameter Ød ₂ [mm]	Diameter Ød ₃ [mm]	L [mm]	L ₁ [mm]
300	150	100	180	40
300	150	125	220	40
300	150	150	250	40
300	160	100	180	40
300	160	125	220	40
300	160	150	250	40
300	160	160	270	40
300	180	100	180	40
300	180	125	220	40
300	180	150	250	40
300	180	160	270	40
300	180	180	300	40
300	200	100	180	40
300	200	125	220	40
300	200	150	250	40
300	200	160	270	40
300	200	180	300	40
300	200	200	350	60
300	225	100	180	40
300	225	125	220	40
300	225	150	250	40
300	225	160	270	40
300	225	180	300	40
300	225	200	350	60
300	225	225	400	60
300	250	125	220	40
300	250	150	250	40
300	250	160	270	40
300	250	180	300	40
300	250	200	350	60
300	250	250	450	80

Reducing tee

TVRQT-45

Dimensions

Diameter Ød ₁ [mm]	Diameter Ød ₂ [mm]	Diameter Ød ₃ [mm]	L [mm]	L ₁ [mm]
315	160	100	180	40
315	160	125	220	40
315	160	150	250	40
315	160	160	270	40
315	180	100	180	40
315	180	125	220	40
315	180	150	250	40
315	180	160	270	40
315	180	180	300	40
315	200	100	180	40
315	200	125	220	40
315	200	150	250	40
315	200	160	270	40
315	200	180	300	40
315	200	200	350	60
315	225	100	180	40
315	225	125	220	40
315	225	160	270	40
315	225	180	300	40
315	225	200	350	60
315	225	225	400	60
315	250	125	220	40
315	250	150	250	40
315	250	160	270	40
315	250	180	300	40
315	250	200	350	60
315	250	250	450	80
315	300	150	250	40
315	300	160	270	40
315	300	180	300	40
315	300	200	350	60
315	300	225	400	60
315	300	250	450	80
315	300	300	450	80

Diameter Ød ₁ [mm]	Diameter Ød ₂ [mm]	Diameter Ød ₃ [mm]	L [mm]	L ₁ [mm]
350	180	100	180	40
350	180	125	220	40
350	180	150	250	40
350	180	160	270	40
350	180	180	300	40
350	200	100	180	40
350	200	125	220	40
350	200	150	250	40
350	200	160	270	40
350	200	180	300	40
350	200	200	350	60
350	250	125	220	40
350	250	150	250	40
350	250	160	270	40
350	250	180	300	40
350	250	200	350	60
350	250	225	400	60
350	250	250	450	80
350	300	150	250	40
350	300	160	270	40
350	300	180	300	40
350	300	200	350	60
350	300	225	400	60
350	300	250	450	80
350	300	300	450	80
350	315	125	220	40
350	315	150	250	40
350	315	160	270	40
350	315	180	300	40
350	315	200	350	60
350	315	225	400	60
350	315	250	450	80
350	315	300	450	80
350	315	315	500	80

Reducing tee

TVRQT-45

Dimensions

Diameter Ød ₁ [mm]	Diameter Ød ₂ [mm]	Diameter Ød ₃ [mm]	L [mm]	L ₁ [mm]
400	200	100	180	40
400	200	125	220	40
400	200	150	250	40
400	200	160	270	40
400	200	180	300	40
400	200	200	350	60
400	225	100	180	40
400	225	125	220	40
400	225	160	270	40
400	225	180	300	40
400	225	200	350	60
400	225	225	400	60
400	250	125	220	40
400	250	150	250	40
400	250	160	270	40
400	250	180	300	40
400	250	200	350	60
400	250	225	400	60
400	250	250	450	80
400	300	150	250	40
400	300	160	270	40
400	300	180	300	40
400	300	200	350	60
400	300	225	400	60
400	300	250	450	80
400	300	300	450	80
400	315	160	270	40
400	315	180	300	40
400	315	200	350	60
400	315	225	400	60
400	315	250	450	80
400	315	300	450	80
400	315	315	500	80
400	350	200	350	60
400	350	250	450	80
400	350	300	450	80
400	350	315	500	80
400	350	350	500	100

Diameter Ød ₁ [mm]	Diameter Ød ₂ [mm]	Diameter Ød ₃ [mm]	L [mm]	L ₁ [mm]
450	315	250	450	80
450	315	300	450	80
450	315	315	500	80
450	350	300	450	80
450	350	315	500	80
450	350	350	500	100
450	400	315	500	80
450	400	350	500	100
450	400	400	550	100
500	350	300	450	80
500	350	315	500	80
500	350	350	500	100
500	400	315	500	80
500	400	350	500	100
500	400	400	550	100
500	450	350	500	100
500	450	400	550	100
500	450	450	600	120
550	400	315	500	80
550	400	350	500	100
550	400	400	550	100
550	450	350	500	100
550	450	400	550	100
550	450	450	600	120
550	450	450	600	120
550	510	400	550	100
550	500	450	600	120
550	500	500	650	120
600	450	350	500	100
600	450	400	550	100
600	450	450	600	120
600	500	400	550	100
600	500	450	600	120
600	500	500	650	120
600	550	450	600	120
600	550	500	650	120
600	550	550	700	140