

Flexible VINYL ventilation ducts

VINYL-R-DUCT, VINYL-S-DUCT**Description**

Round and square VINYL ducts are made from 60 micron VINYL film and reinforced with coiled steel wire. This duct type can be used in air heating, cooling, ventilation and/or A/C systems. The ducts can be used in low to medium pressure systems. The high flexibility makes this product perfect for ductwork systems exposed to continuous vibration.

Packaging: 1, 3 or 6 metre sections compressed and packed in plastic film.

Flexibility (winding diameter): Depends on the actual duct diameter, i.e. ca. 0.6D (mm).


Temperature range: -20°C to +70°C

Max. pressure: The maximum acceptable operating pressure is 2000 Pa.


Product code example

Product code: **VINYL-R-DUCT - aaa - bbb**

type _____
 Ød _____
 length _____

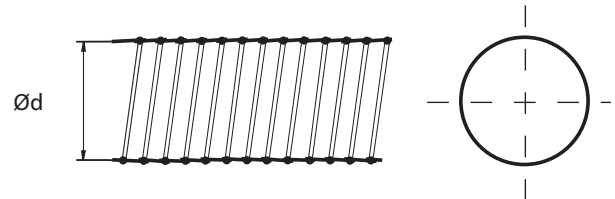Dimensions

Product code	Ød (mm)	Ød _{out} (mm)	Length (m)	Max. acceptable pressure (Pa)
VINYL-R-DUCT-100-0100	100	102	1	2000
VINYL-R-DUCT-100-0300	100	102	3	2000
VINYL-R-DUCT-100-0600	100	102	6	2000
VINYL-R-DUCT-125-0100	125	127	1	2000
VINYL-R-DUCT-125-0300	125	127	3	2000
VINYL-R-DUCT-125-0600	125	127	6	2000
VINYL-R-DUCT-150-0100	150	152	1	2000
VINYL-R-DUCT-150-0300	150	152	3	2000
VINYL-R-DUCT-150-0600	150	152	6	2000

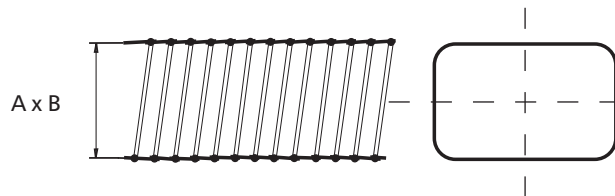

Product code	Dimensions A x B (mm)	Dimensions A _{out} x B _{out} (mm)	Length (m)	Max. acceptable pressure (Pa)
VINYL-S-DUCT-55-110-0100	55x110	57x112	1	2000
VINYL-S-DUCT-55-110-0300	55x110	57x112	3	2000
VINYL-S-DUCT-55-110-0600	55x110	57x112	6	2000
VINYL-S-DUCT-75-150-0100	75x150	77x152	1	2000
VINYL-S-DUCT-75-150-0300	75x150	77x152	3	2000
VINYL-S-DUCT-75-150-0600	75x150	77x152	6	2000