

CPFI



Description

The CPFI is designed for stopping fittings.

Thermal conductivity:

- isolation 25 mm - 0.037 W/mk unchanging time
- isolation 50 mm - 0.042 W/mk unchanging time
- isolation 100 mm - 0.042 W/mk unchanging time

Note!

Different materials can be used for both the inner duct wall and the outer duct wall.

Product code example: CPFI-K-C-50-200

Available materials - Product code example


- CPFI-C-...-... - galvanized steel sheet
- CPFI-K-...-... - 1.4301/304 stainless steel sheet
- CPFI-A-...-... - aluminium steel sheet

Product code example

Product code: CPFI-C - 25 - 200

type _____
 insulation _____
 Ød _____

Dimensions

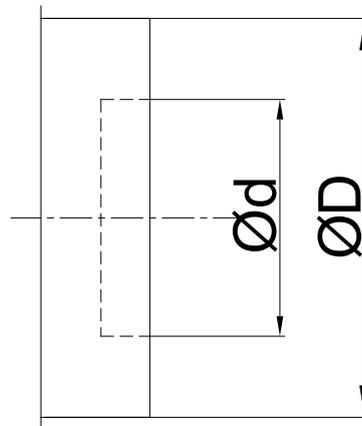

25 mm insulation

Ød [mm]	ØD [mm]	Weight [kg/m]	Ød [mm]	ØD [mm]	Weight [kg/m]
100	150	0.4	250	300	1.5
125	180	0.5	280	315	1.8
140	200	0.6	300	355	2.1
150	200	0.6	315	355	2.2
160	224	0.7	355	400	2.6
180	224	0.9	400	450	3.2
200	250	1.0	450	500	3.8
224	280	1.2	500	560	4.1

50 mm insulation

Ød [mm]	ØD [mm]	Weight [kg/m]	Ød [mm]	ØD [mm]	Weight [kg/m]
100	200	0.6	250	355	2.1
125	224	0.7	280	400	2.2
140	250	0.9	300	400	2.3
150	250	1.0	315	400	2.6
160	250	1.1	355	450	3.3
180	280	1.2	400	500	3.5
200	300	1.3	450	560	4.5
224	315	1.7	500	600	4.8

100 mm insulation

Ød [mm]	ØD [mm]	Weight [kg/m]	Ød [mm]	ØD [mm]	Weight [kg/m]
100	300	0.9	250	450	2.6
125	315	0.9	280	500	2.9
140	355	1.4	300	500	2.9
150	355	1.6	315	500	2.9
160	355	1.8	355	560	3.6
180	400	1.9	400	600	3.9
200	400	1.9	450	630	4.7
224	450	2.2	500	710	6.4